


RODS

presentanova®




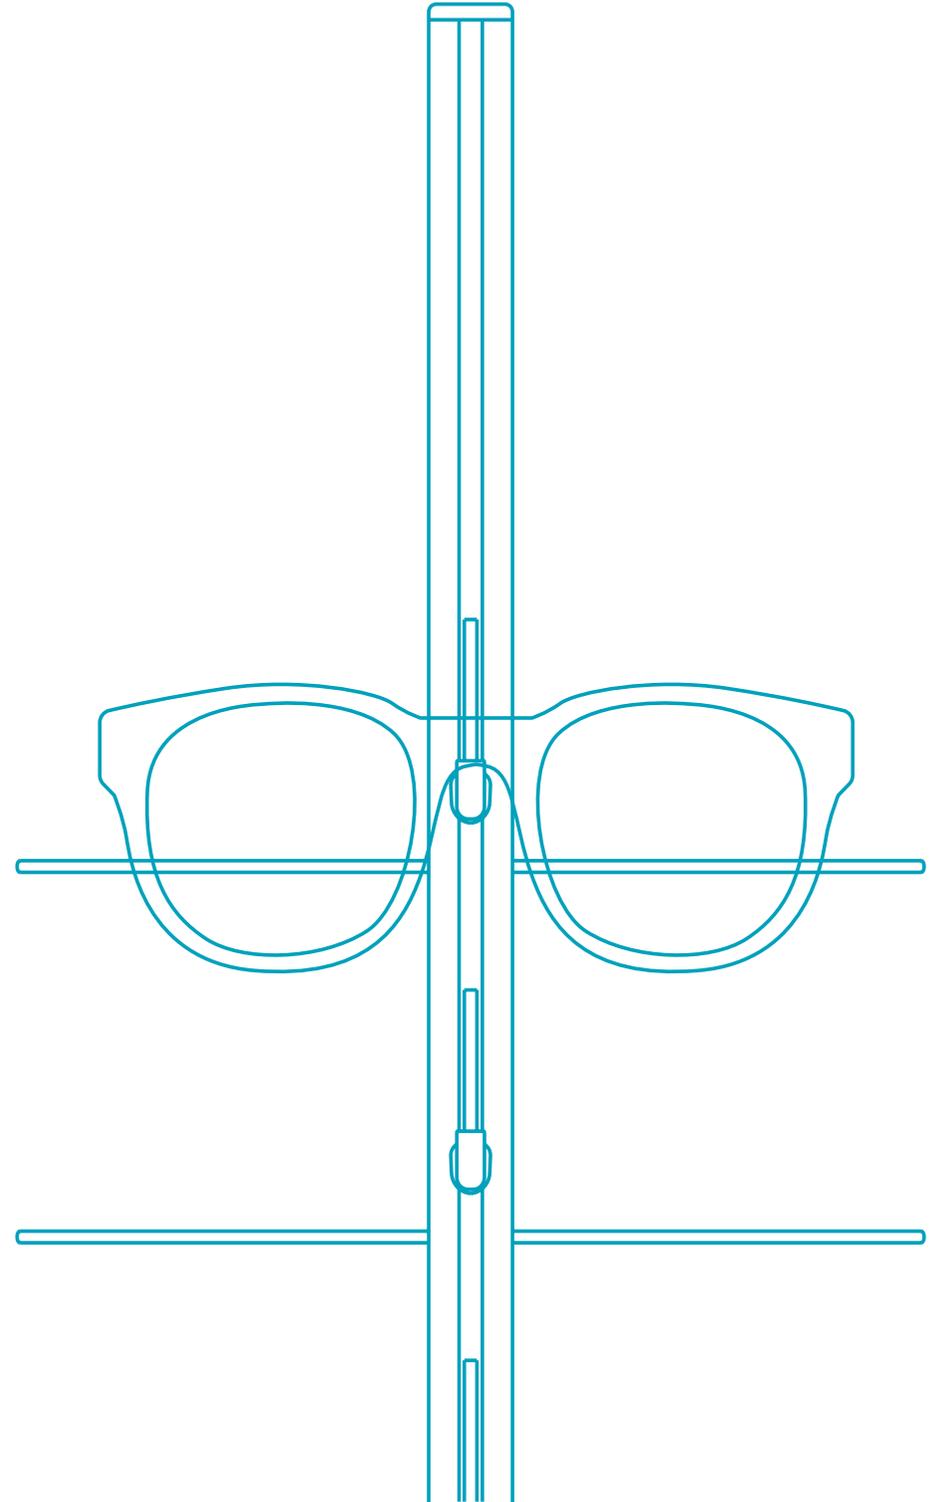


RR KEY-LOCKABLE RODS

5 year guarantee on rods.

ROD




HOOK SIZE



STANDARD SIZES

70 mm frame distance

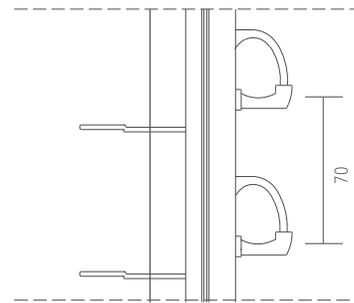

591 mm	6	∞	RR6.L
661 mm	7	∞	RR7.L
731 mm	8	∞	RR8.L
801 mm	9	∞	RR9.L
871 mm	10	∞	RR10.L
941 mm	11	∞	RR11.L
1011 mm	12	∞	RR12.L
1081 mm	13	∞	RR13.L
1151 mm	14	∞	RR14.L
1221 mm	15	∞	RR15.L
1291 mm	16	∞	RR16.L
1361 mm	17	∞	RR17.L
1431 mm	18	∞	RR18.L
1571 mm	20	∞	RR20.L

LOCKING SYSTEM

PATENT ROTO REVOLUTION
EU No: 1 768 524
U.S. 11/814.771

RETRACTABLE ROTATING HOOK




Once unlocked, the hook retracts completely into the rod - providing 5x more space than the standard linear locking systems:

- > Comfortable handling
- > Minimised eyewear damage

UNLOCKING / LOCKING



Key-lock is positioned at the bottom of the rod. A turn of a key opens all the hooks on the rod simultaneously.

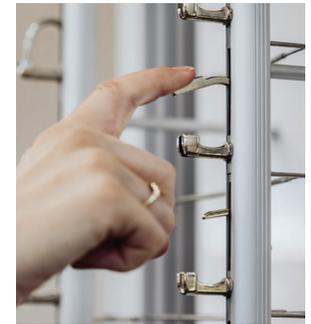

Hooks are simultaneously locked back in again manually.






SRC REMOTE LOCKABLE RODS



5 year guarantee on rods.

2 year guarantee on electronics.

ROD

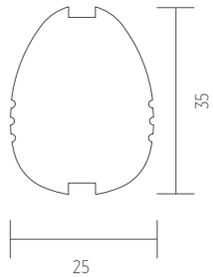


HOOK SIZE

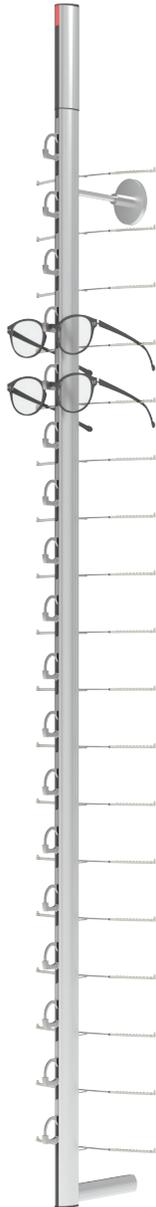

STANDARD SIZES

70 mm frame distance

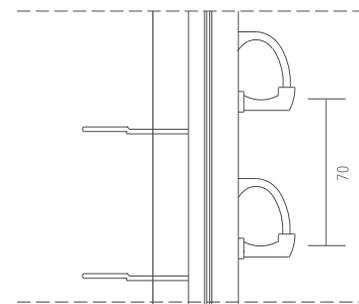

940 mm	10	○	SRCRF10
1010 mm	11	○	SRCRF11
1080 mm	12	○	SRCRF12
1150 mm	13	○	SRCRF13
1220 mm	14	○	SRCRF14
1290 mm	15	○	SRCRF15
1360 mm	16	○	SRCRF16
1430 mm	17	○	SRCRF17
1500 mm	18	○	SRCRF18



LOCKING SYSTEM

PATENT ROTO REVOLUTION

EU No: 1 768 524

U.S. 11/814.771

RETRACTABLE ROTATING HOOK



Once unlocked, the hook retracts completely into the rod - providing 5x more space than the standard linear locking systems:

- > Comfortable handling
- > Minimised eyewear damage

UNLOCKING / LOCKING




Electrical motor on top of the rod is controlled with a remote control. System allows programmed locking of one rod, or of all rods on the panel from distance.

Red light on the motor turns on automatically when the entire rod is unlocked, but also in cases of unpermitted contact with the locked rod.

In such events, an audio alarm will turn on to prevent potential theft.


RECEIVER

Allows remote control locking of 1 GROUP (max 6 rods)



REMOTE

Programme & control 8-14 SRC GROUPS.






RR NON-LOCKABLE RODS


5 year guarantee on rods.

ROD

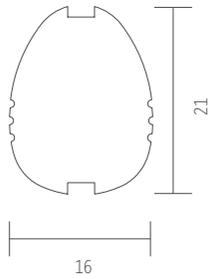

STANDARD SIZES


70 mm frame distance

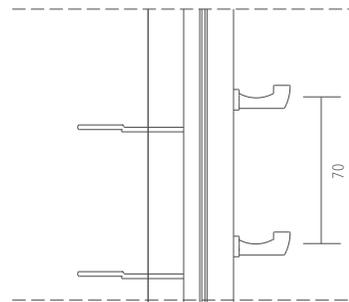

591 mm	6	⊙⊙	RR6.0
661 mm	7	⊙⊙	RR7.0
731 mm	8	⊙⊙	RR8.0
801 mm	9	⊙⊙	RR9.0
871 mm	10	⊙⊙	RR10.0
941 mm	11	⊙⊙	RR11.0
1011 mm	12	⊙⊙	RR12.0
1081 mm	13	⊙⊙	RR13.0
1151 mm	14	⊙⊙	RR14.0
1221 mm	15	⊙⊙	RR15.0
1291 mm	16	⊙⊙	RR16.0
1361 mm	17	⊙⊙	RR17.0
1431 mm	18	⊙⊙	RR18.0
1571 mm	20	⊙⊙	RR20.0

STANDARD SIZES

56 mm frame distance

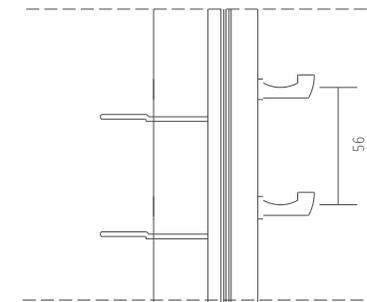


486 mm	6	⊙⊙	RR6.01
542 mm	7	⊙⊙	RR7.01
598 mm	8	⊙⊙	RR8.01
654 mm	9	⊙⊙	RR9.01
710 mm	10	⊙⊙	RR10.01
766 mm	11	⊙⊙	RR11.01
822 mm	12	⊙⊙	RR12.01
878 mm	13	⊙⊙	RR13.01
934 mm	14	⊙⊙	RR14.01
990 mm	15	⊙⊙	RR15.01
1046 mm	16	⊙⊙	RR16.01
1102 mm	17	⊙⊙	RR17.01
1158 mm	18	⊙⊙	RR18.01
1494 mm	24	⊙⊙	RR24.01





LUCID NON-LOCKABLE RODS

5 year guarantee on rods.

ROD




HOLDER SIZE

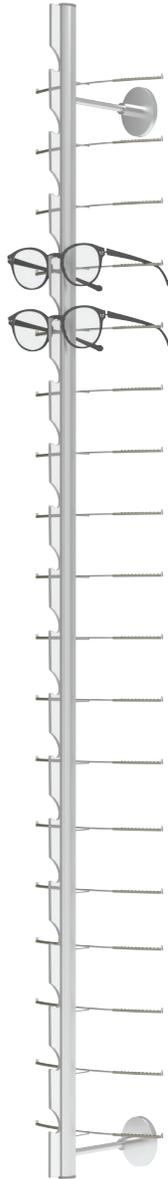

STANDARD SIZES

70 mm frame distance




Standard frame distance.
Perfect even for large eyewear.
Comfortable handling.

1011 mm	12	○	RT12.0
1221 mm	15	○	RT15.0
1431 mm	18	○	RT18.0

STANDARD SIZES

56 mm frame distance

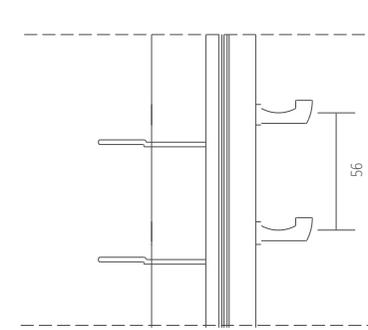

Allows display of up to 24 frames on a 1
single rod.
Ideal for smaller frames.
Comfortable handling.

1046 mm	16	○	RT16.01
1158 mm	18	○	RT18.01
1494 mm	24	○	RT24.01



INSTALLATION

MOUNTING KIT


One rod fixing (RR.BH3) for all surfaces: acrylic, drywall, plywood, concrete, brick wall. etc.

SRC rods can not be installed directly onto a wall, additional plate is required.



DISTANCE BETWEEN RODS


Recommended distance between the rods is 200 mm.

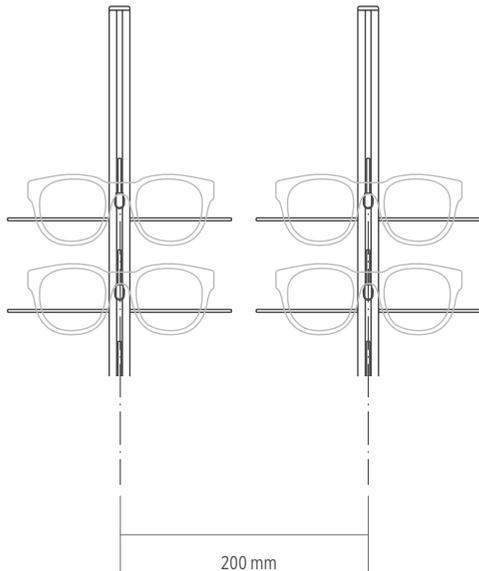

DISTANCE FROM THE BACK SURFACE


RR / RT rods

Required distance between the rod and the back surface is 126 mm.






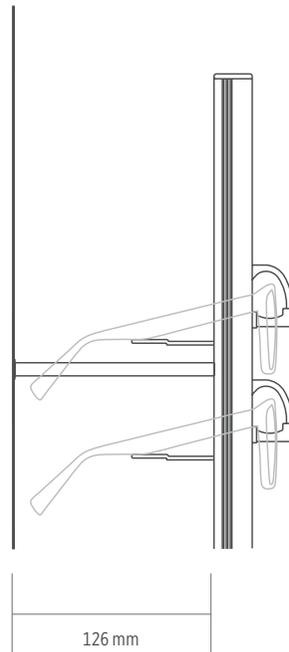


SRC rods

Required distances between the rod and the back panel (3-15 mm thick) is 126 mm. Minimal distance required for the electrical parts for SRC rods (cable RJ11 connector) is 60 mm.

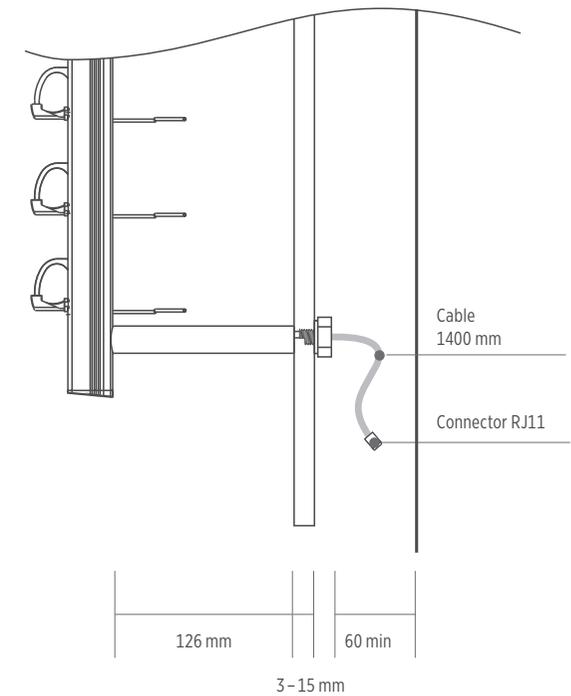

ACCESSORIES

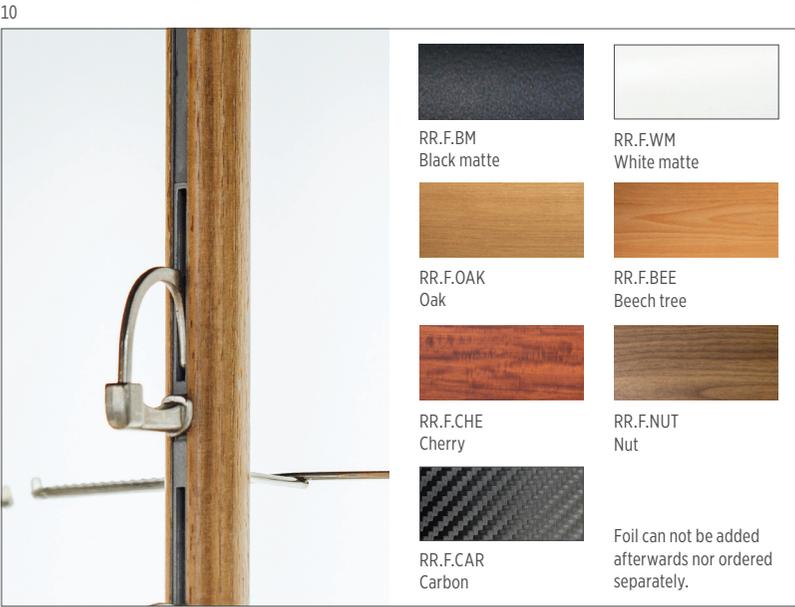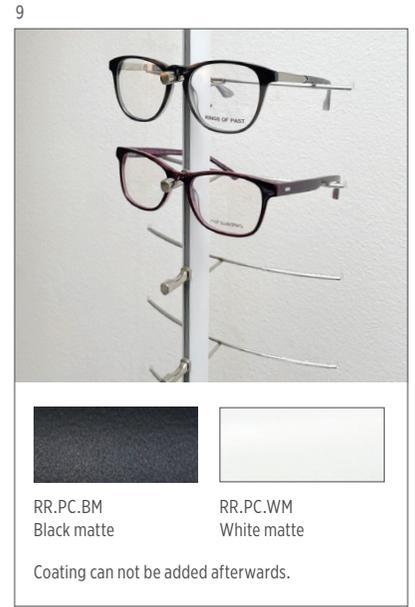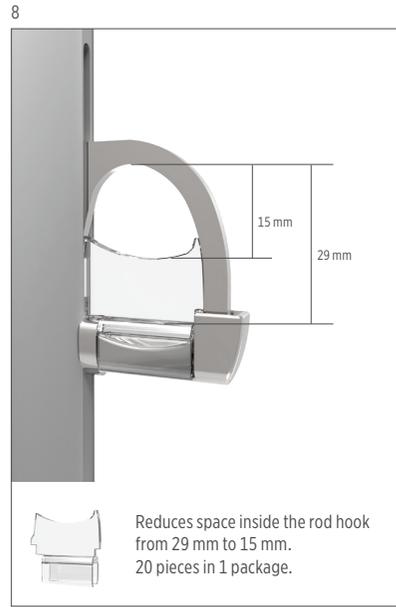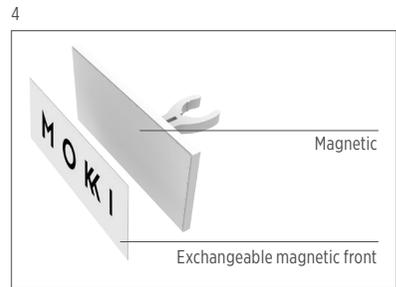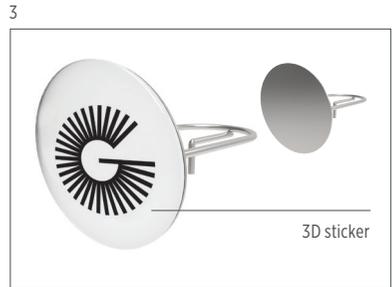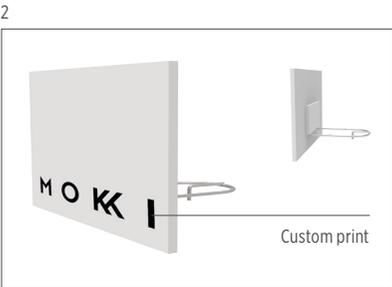

- 1 Logo holder with exchangeable inserts.
120x80 mm A.RR.LH1.L
120x50 mm A.RR.LH1.S
90x50 mm A.FRR.LH1
- 2 Acrylic rectangular logo holder, custom print.
120x50 mm A.RR.LH2
- 3 Elliptical logo holder.
72x57 mm A.RR.LH3
72x57 mm / freestanding displays A.FRR.LH3
Self-adhesive 3D sticker with custom print.
72x57 mm A.LH3.STC
- 4 Magnetic rectangular logo holder in acrylic.
120x50 mm / RR rods A.RR.LH4
120x50 mm / SRC rods A.SRC.LH4
Magnetic front with custom print.
120x50 mm A.LH4.STC
- 5 Advertisement holder with exchangeable inserts.
A5 DIN format A.RR.AP
- 6 Acrylic mirror. Installed onto the rod.
150x110 mm A.RR.M1
- 7 Back support for frame temples. A.RR.BS
- 8 Adapter for small eyewear. 20 pcs. A.RR.ADP
- 9 Decorative powder coating for rod.
- 10 Decorative vinyl foils for rod.

presentanova[®]

HQ & PRODUCTION
Presenta Nova d.o.o.
Puzeva 7
HR-10020 Zagreb
+385 1 6524 048
info@presenta-nova.hr
www.presenta-nova.com

